


LDX250

叶轮外径: 250mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

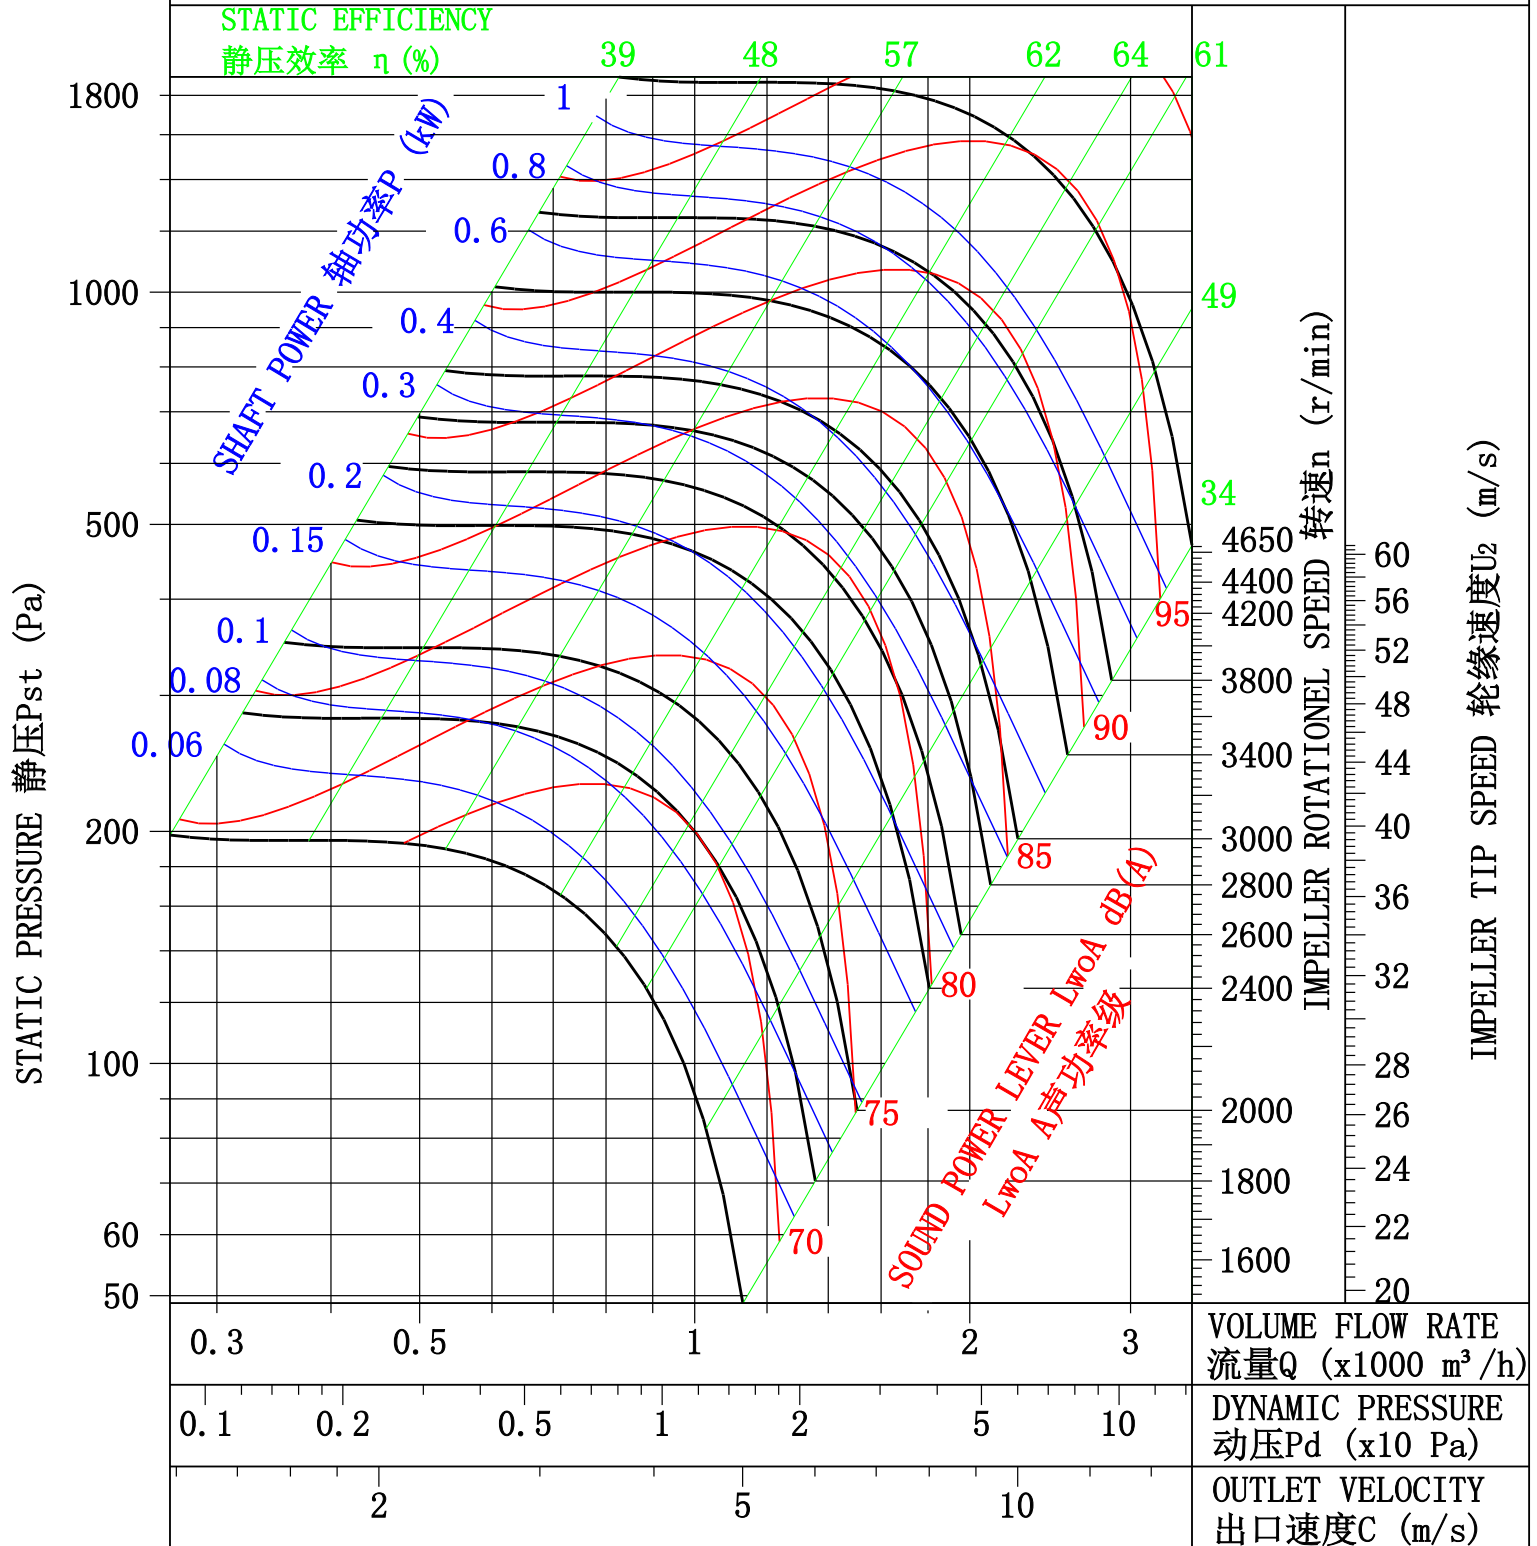


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX280

叶轮外径: 280mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

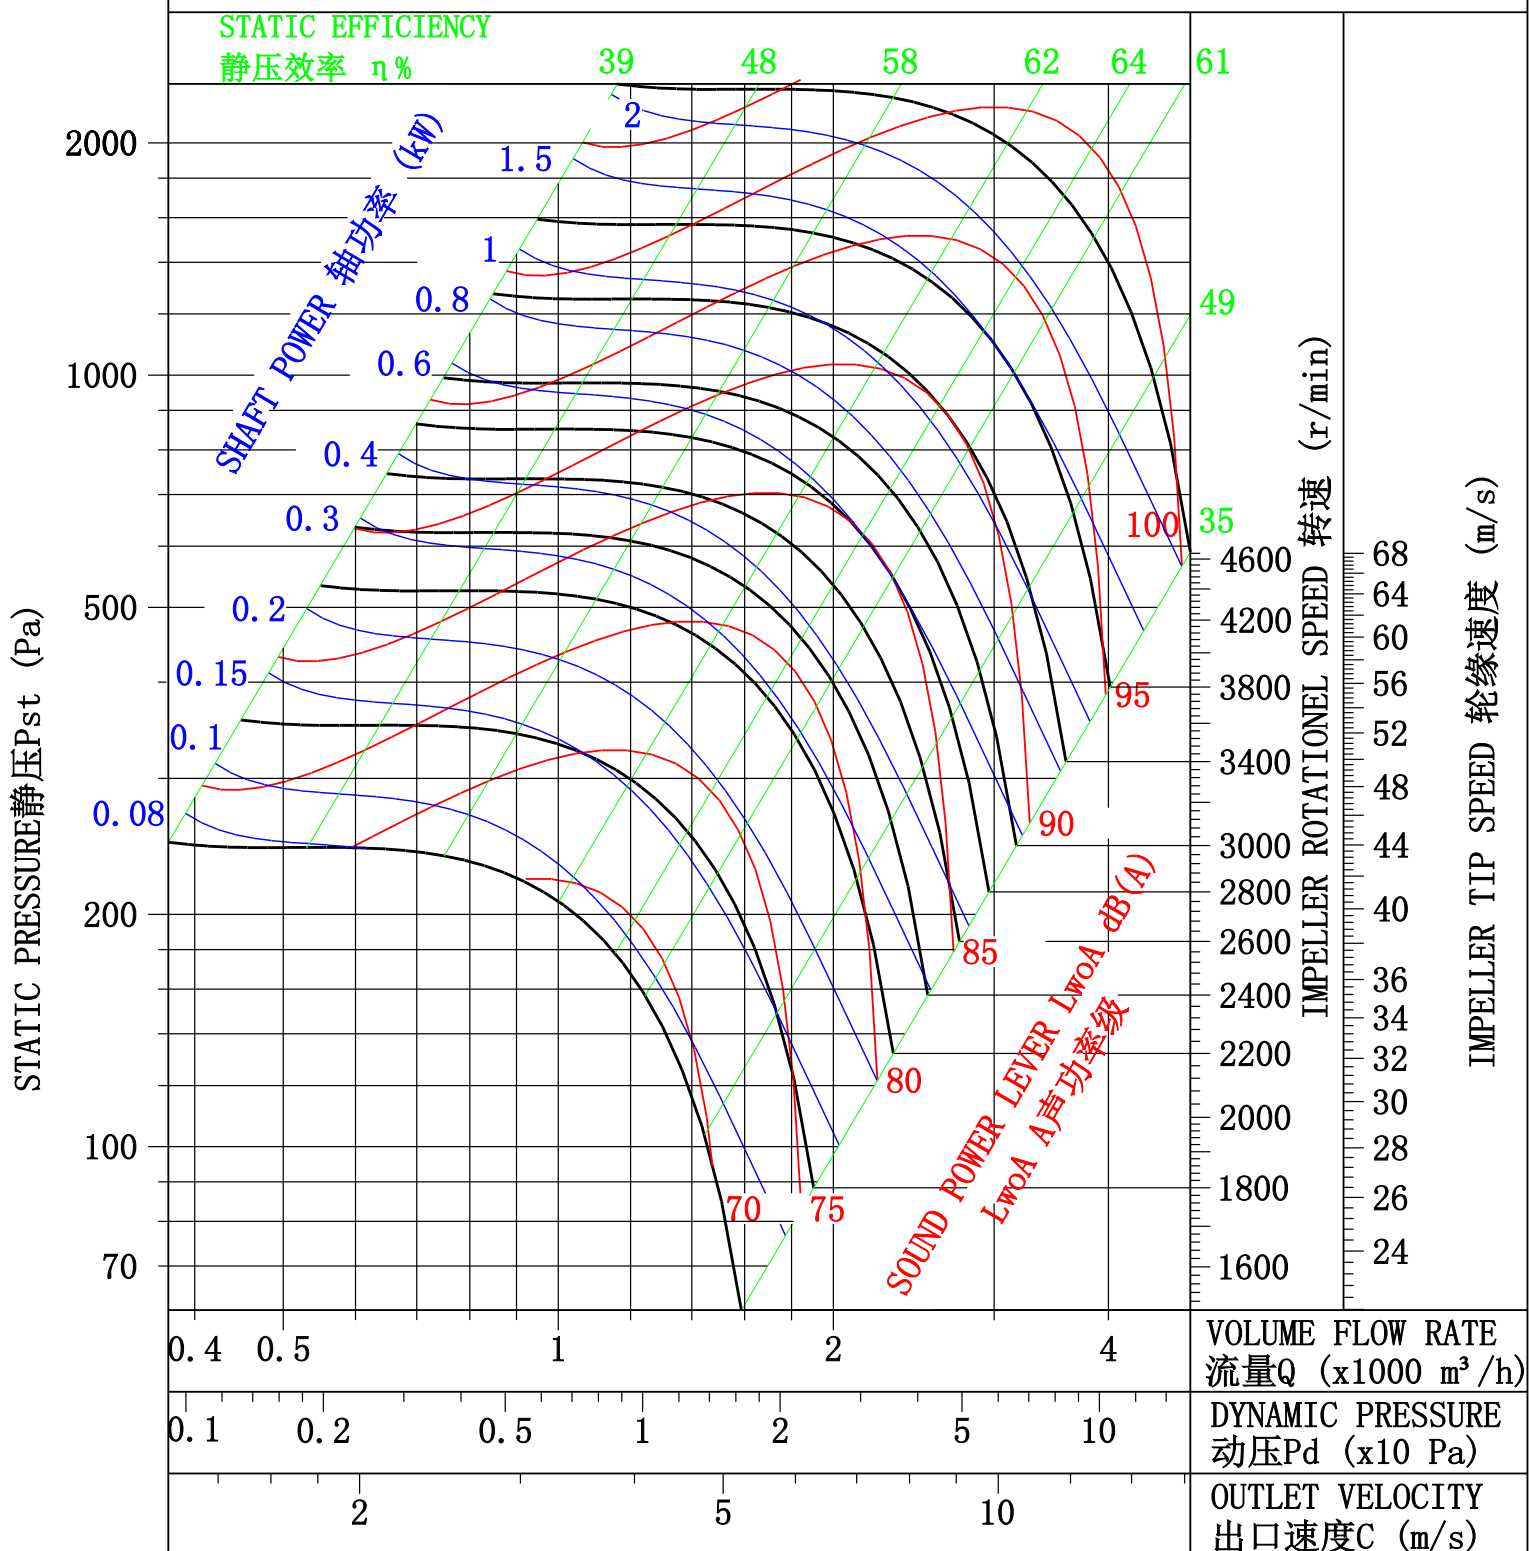


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX315

叶轮外径: 315mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

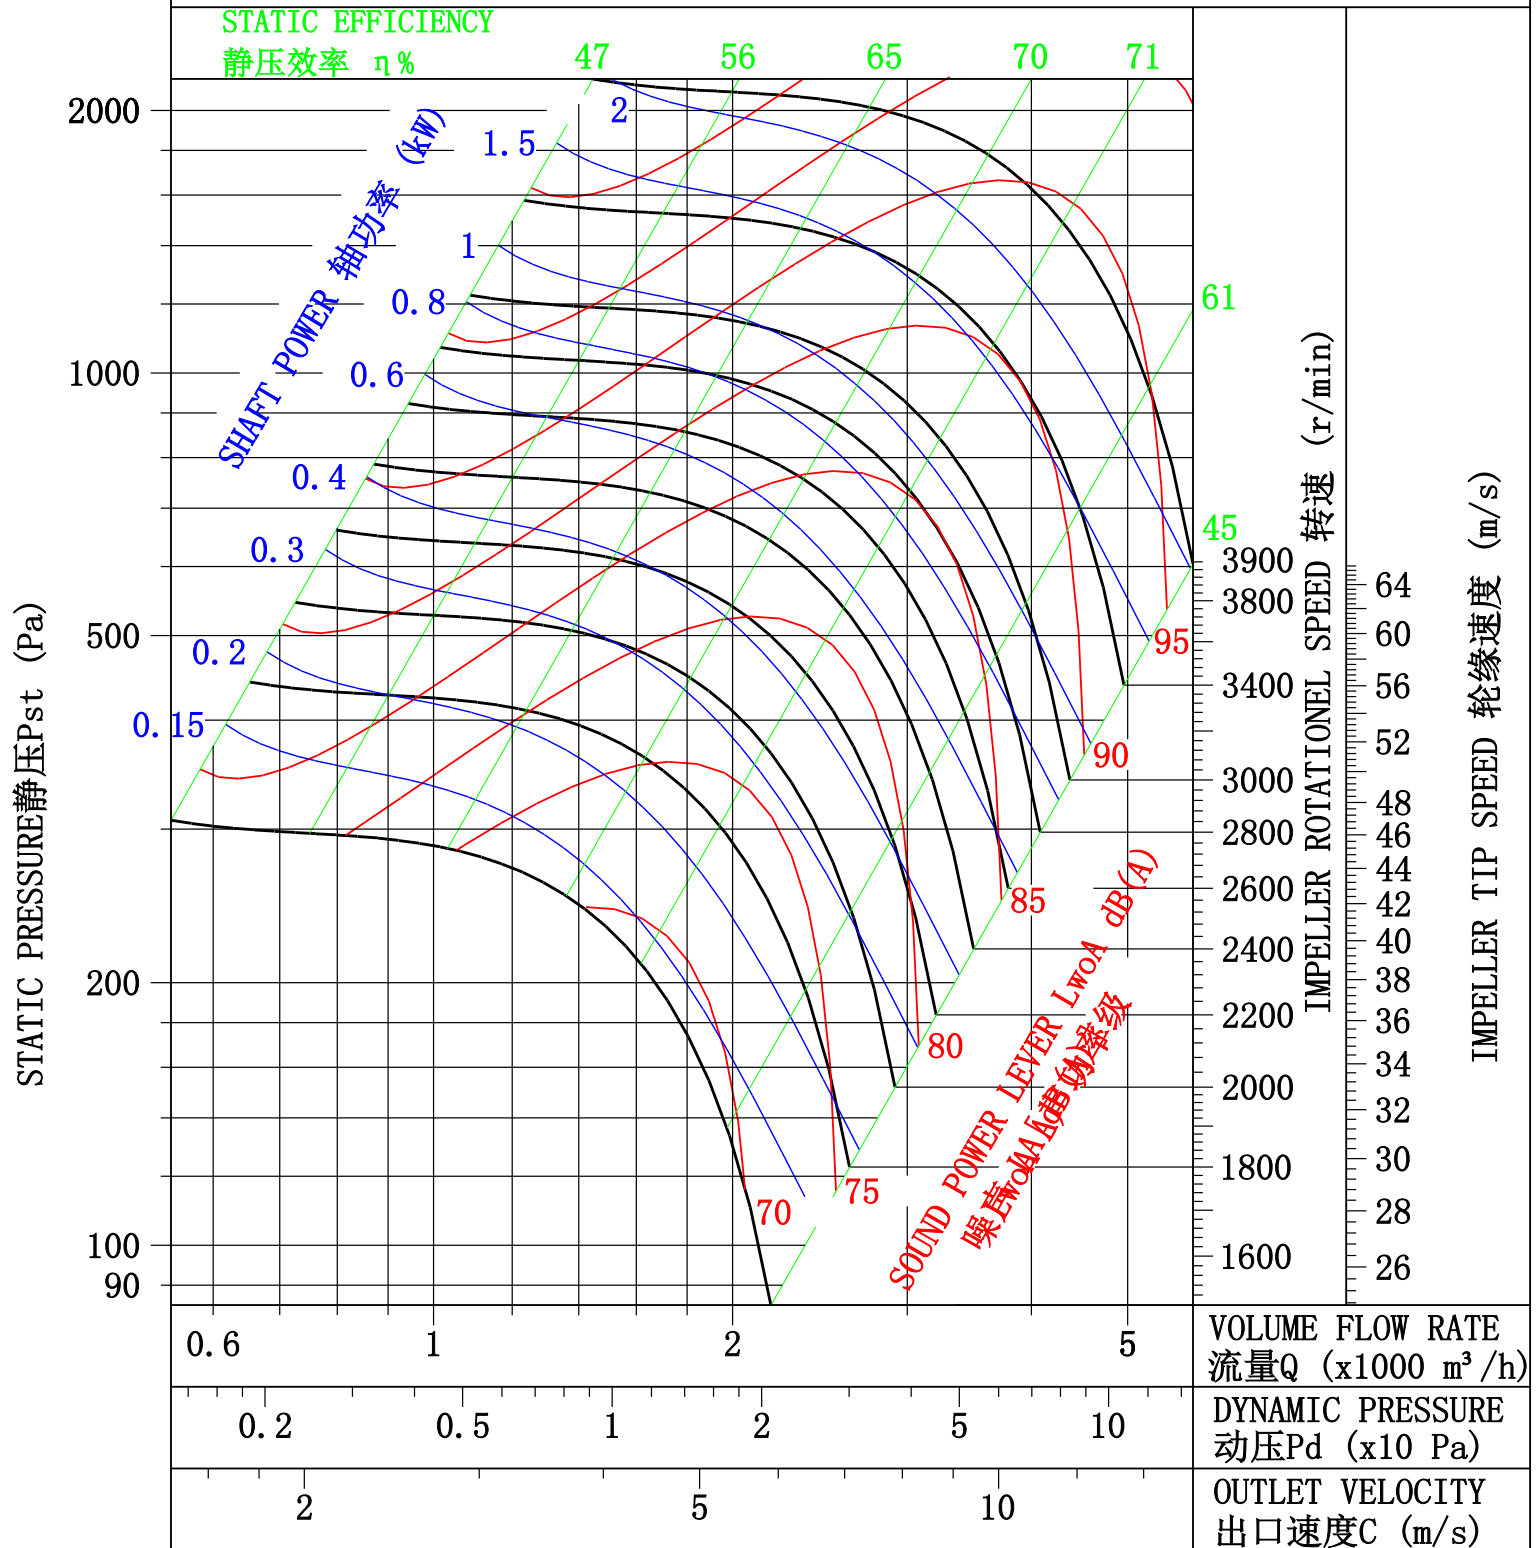


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX355

叶轮外径: 355mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

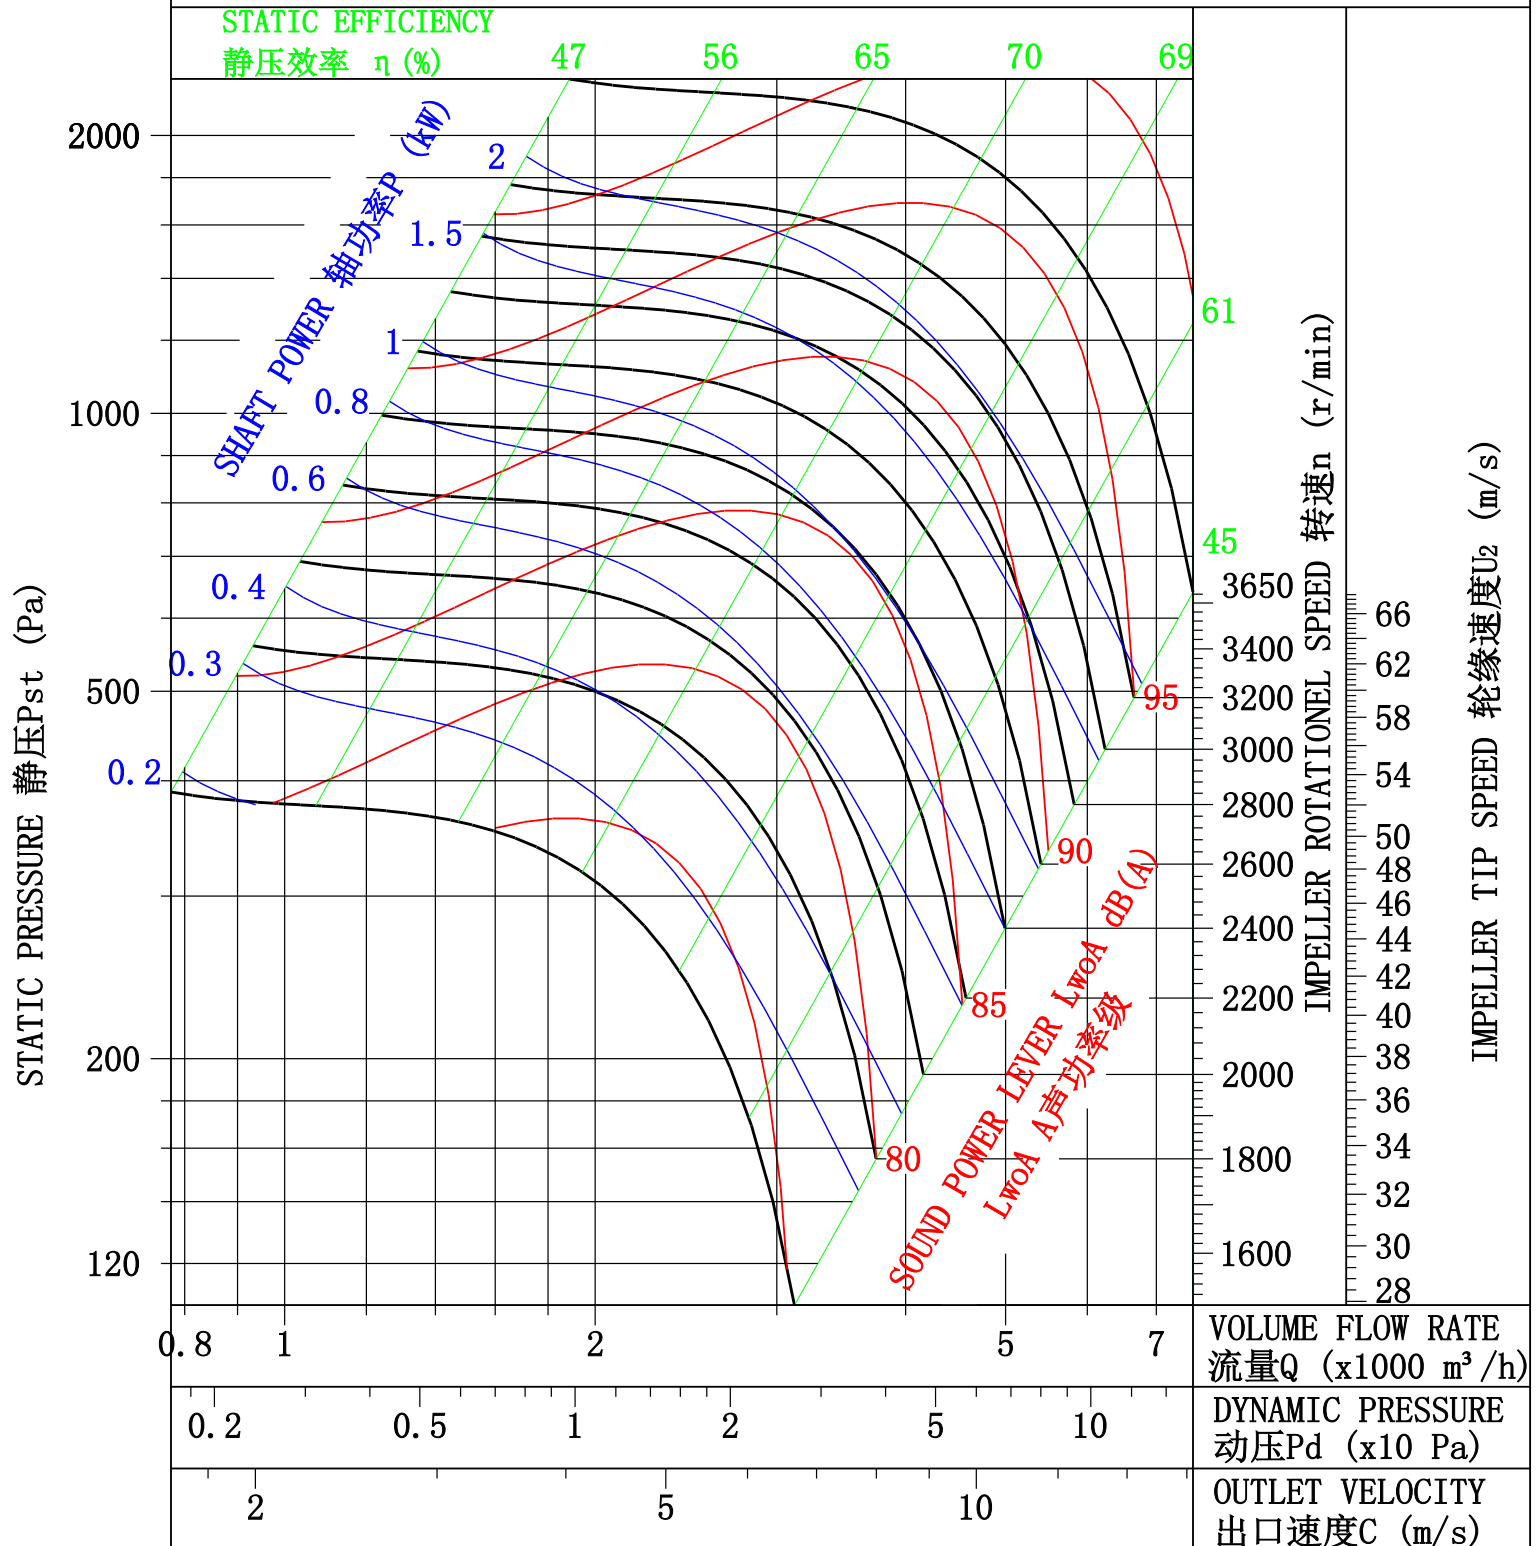


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX400

叶轮外径: 400mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

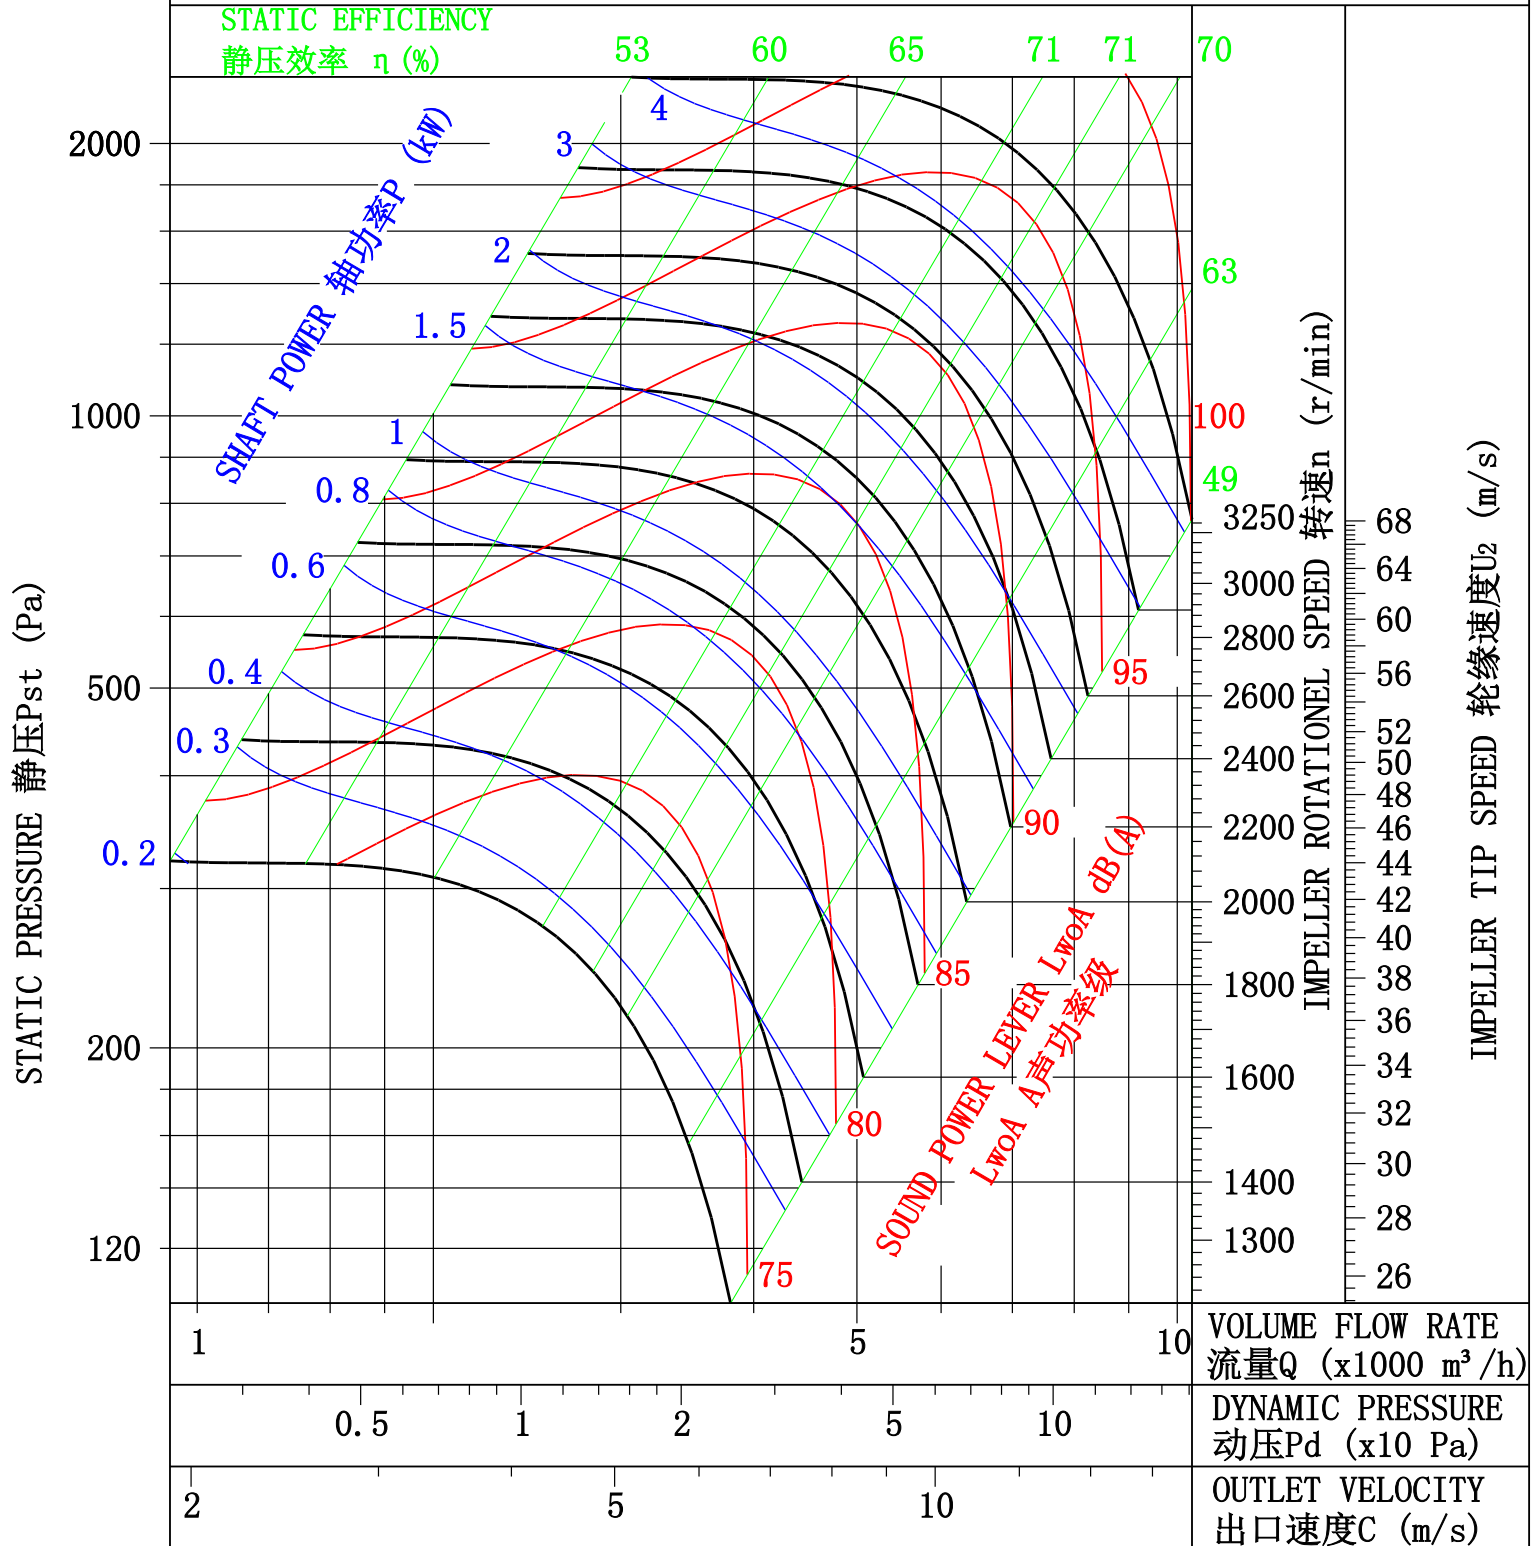


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX450

叶轮外径: 450mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

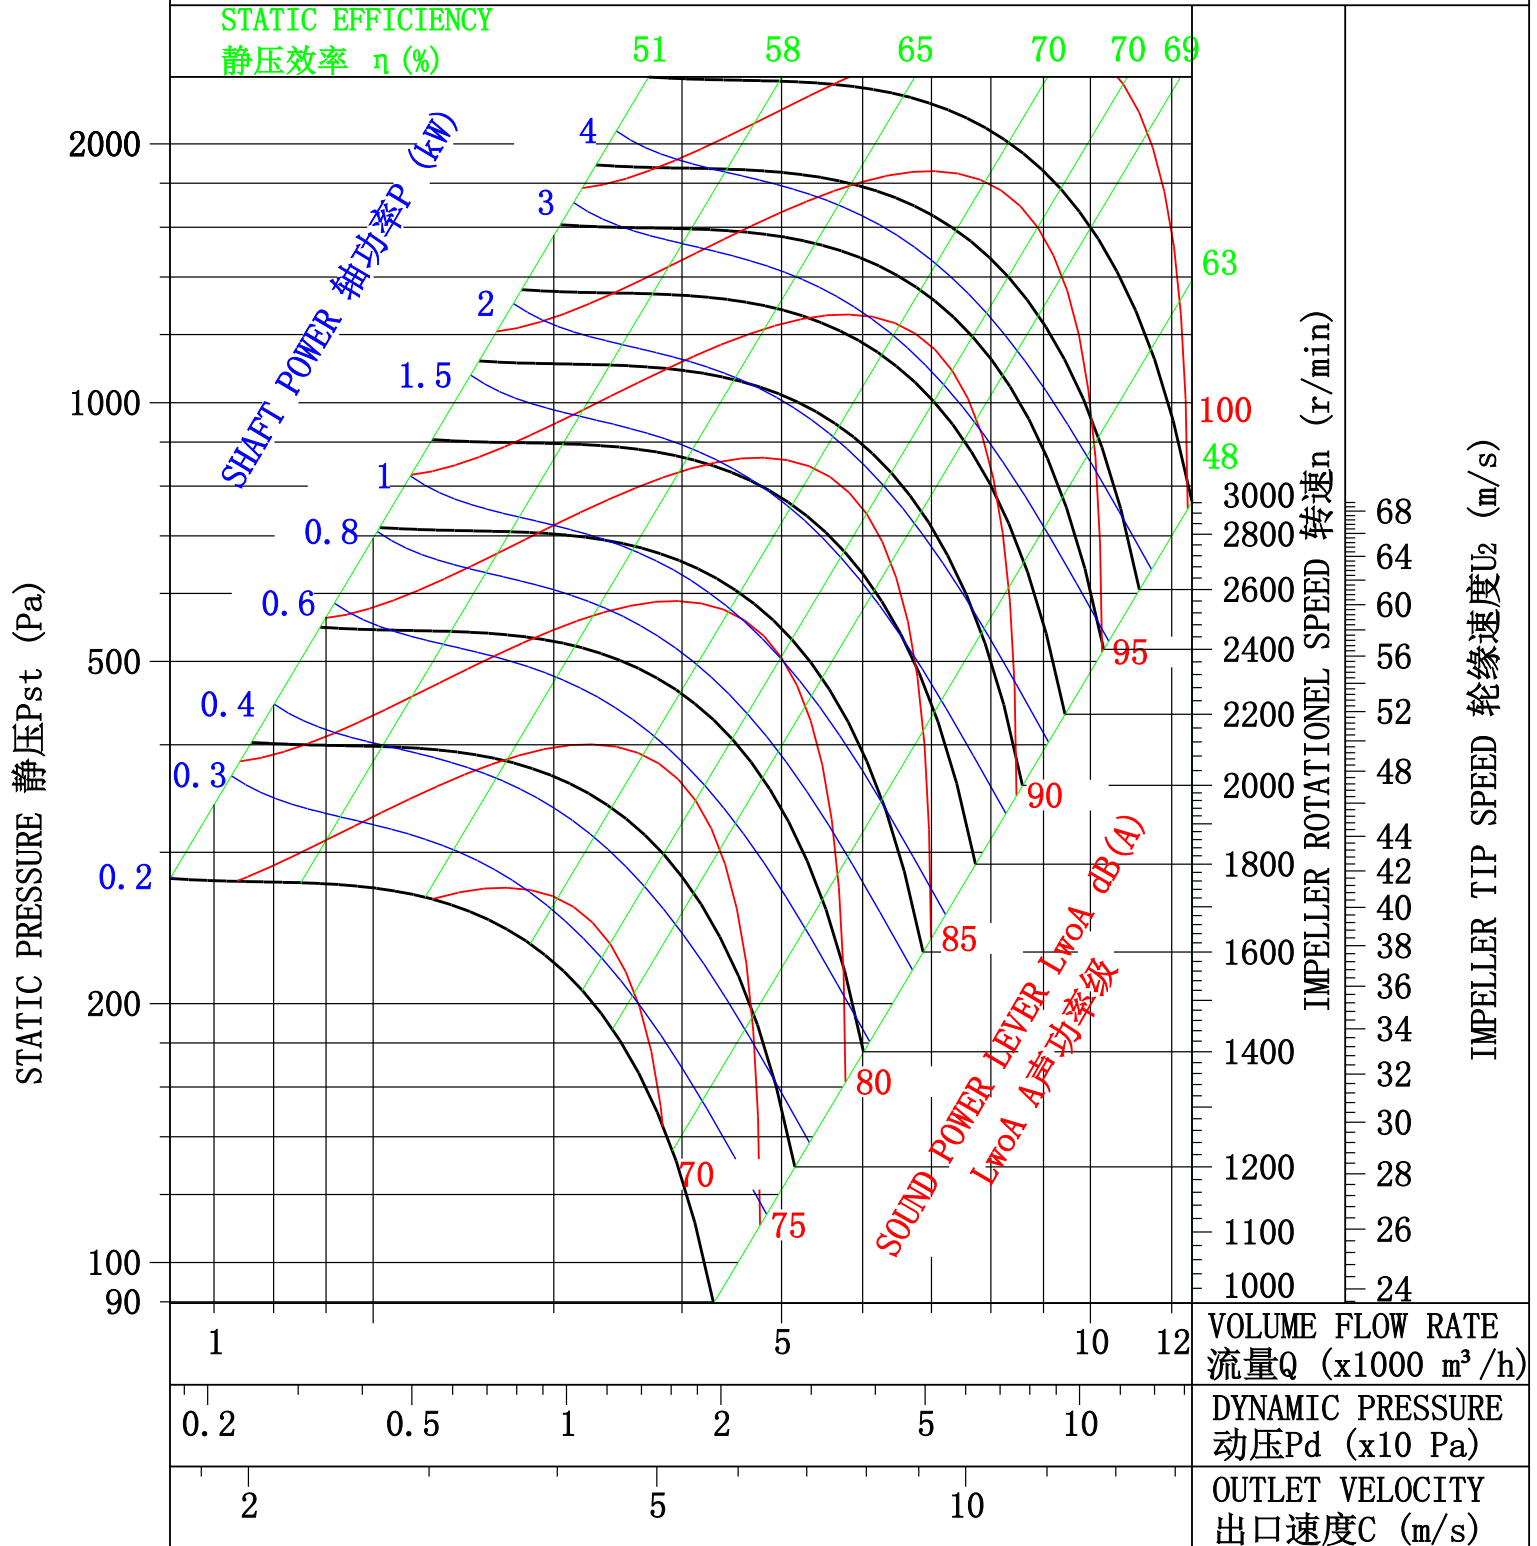


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX500

叶轮外径: 500mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

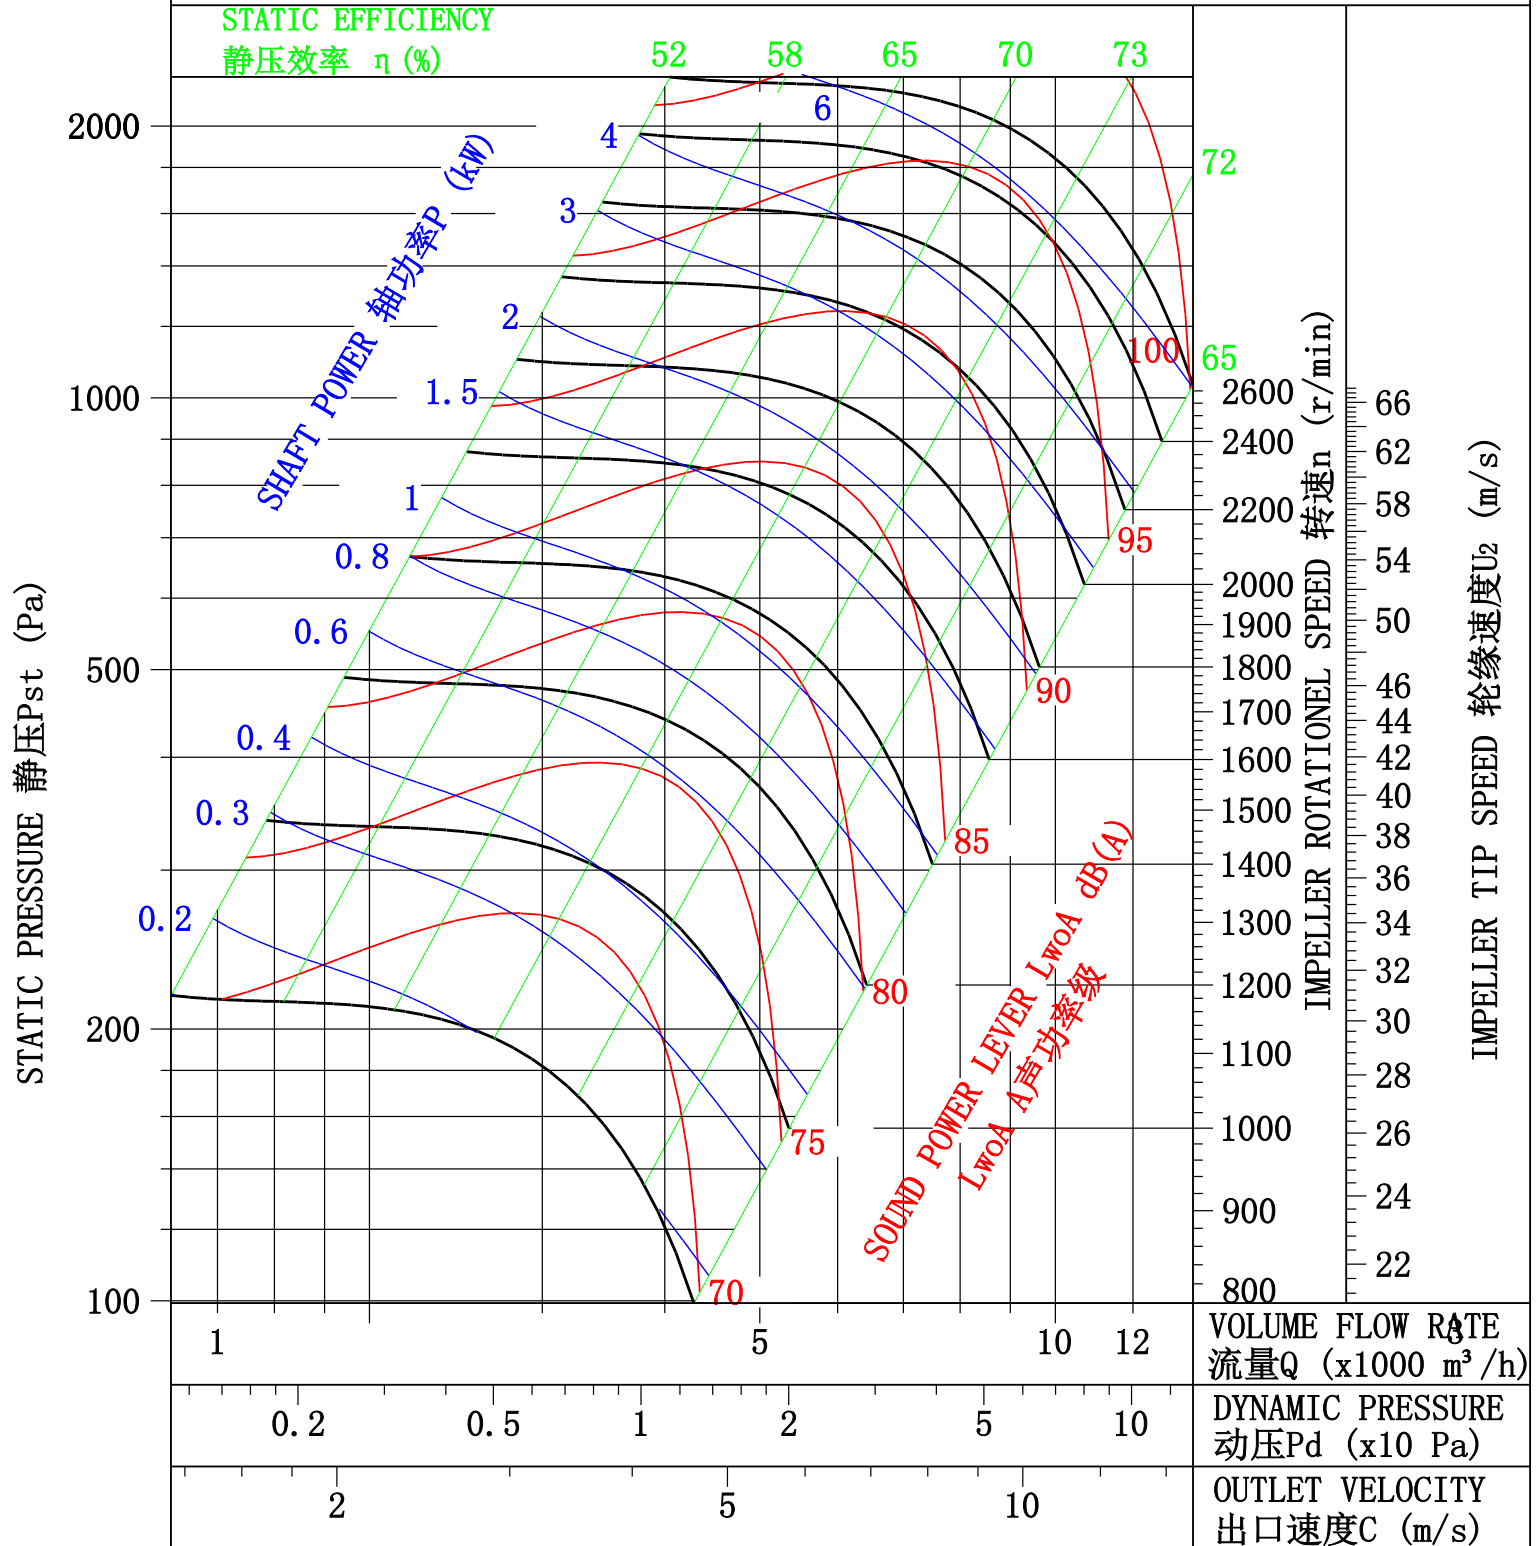


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得, 即自由进气, 自由出气, 所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX560

叶轮外径: 560mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

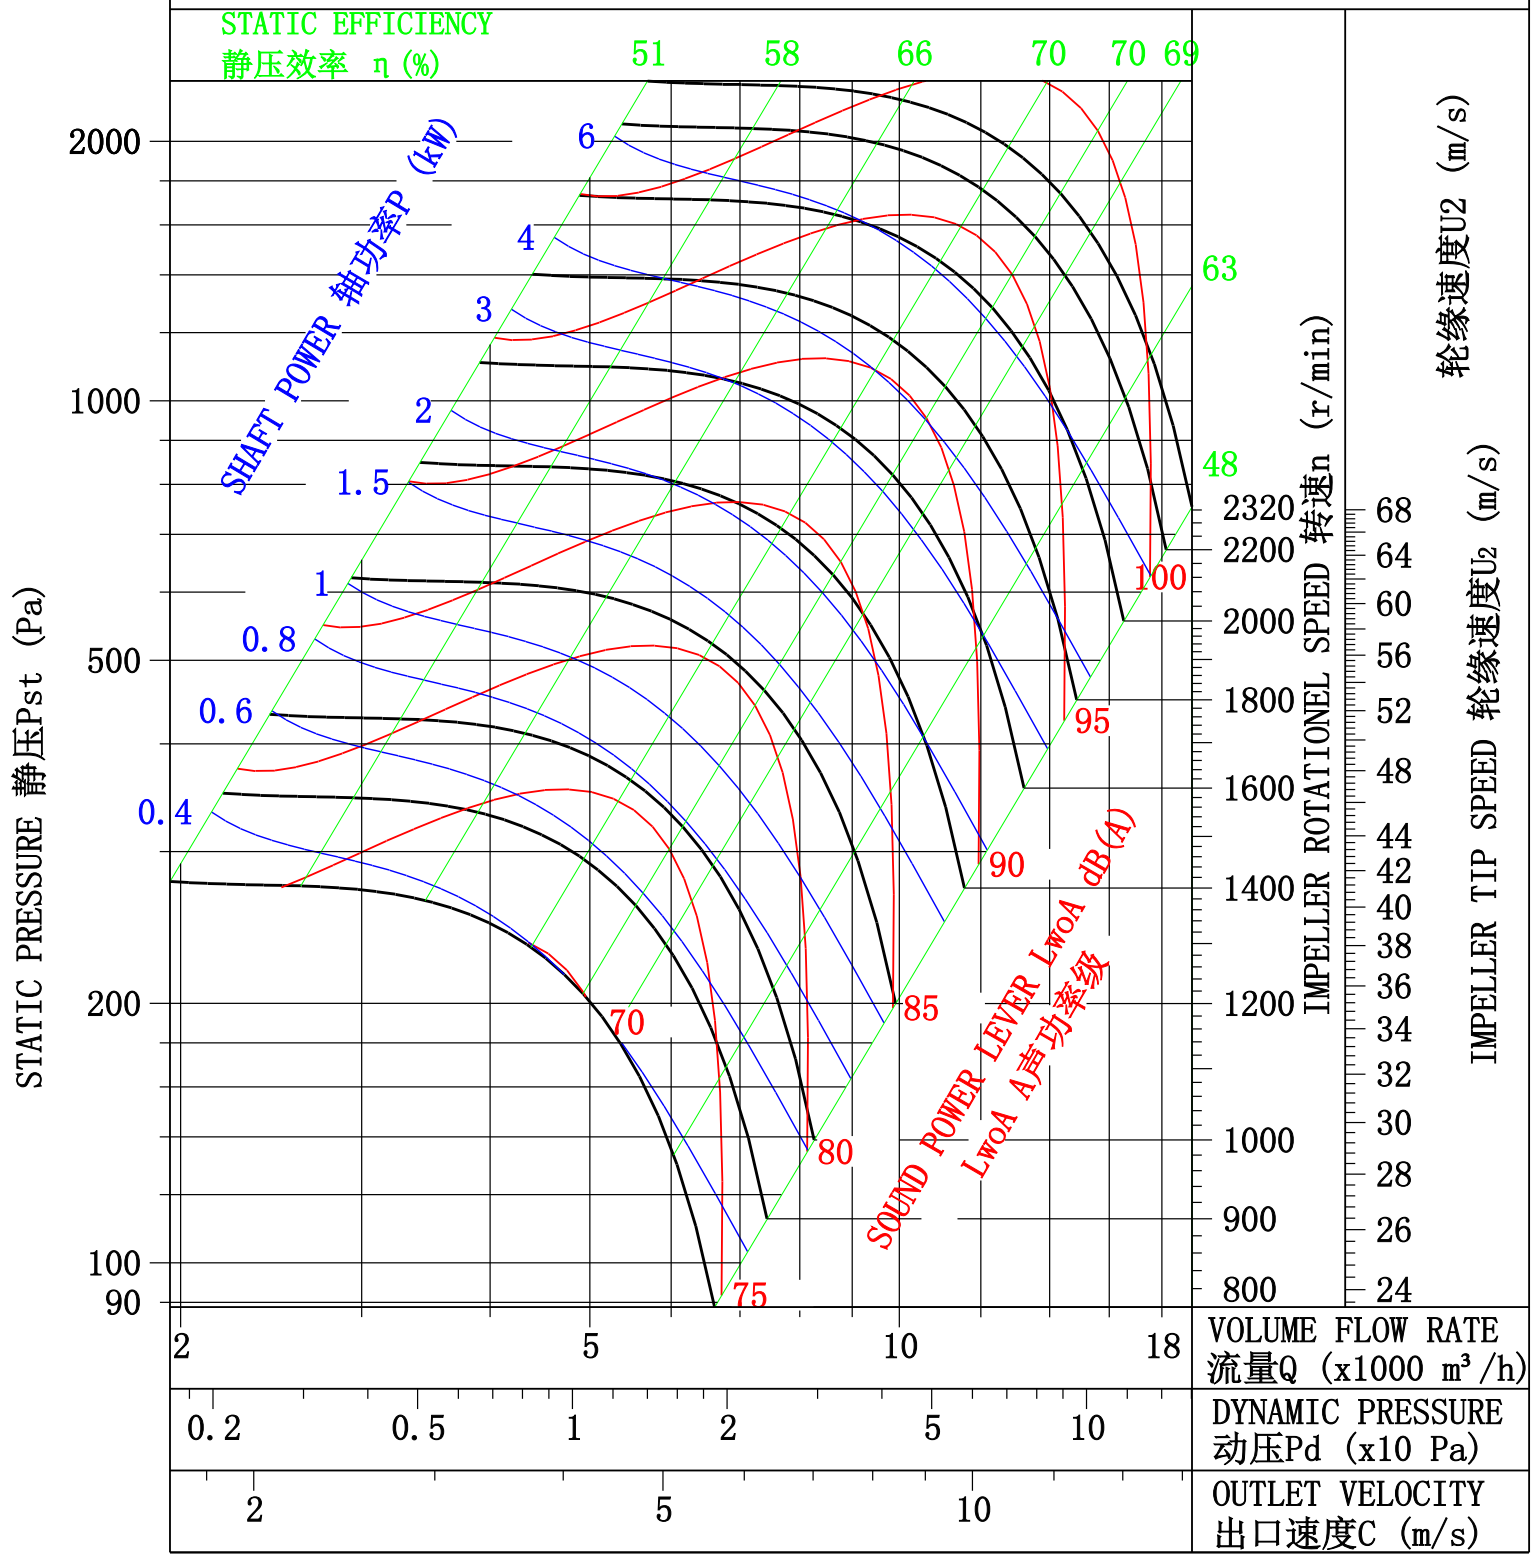


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX630

叶轮外径: 630mm
 Impeller diameter
 气体密度: 1.2 kg/m³
 Gas density

大气压: 101.32 kPa
 Atmospheric pressure
 气体温度: 20 °C
 Gas temperature

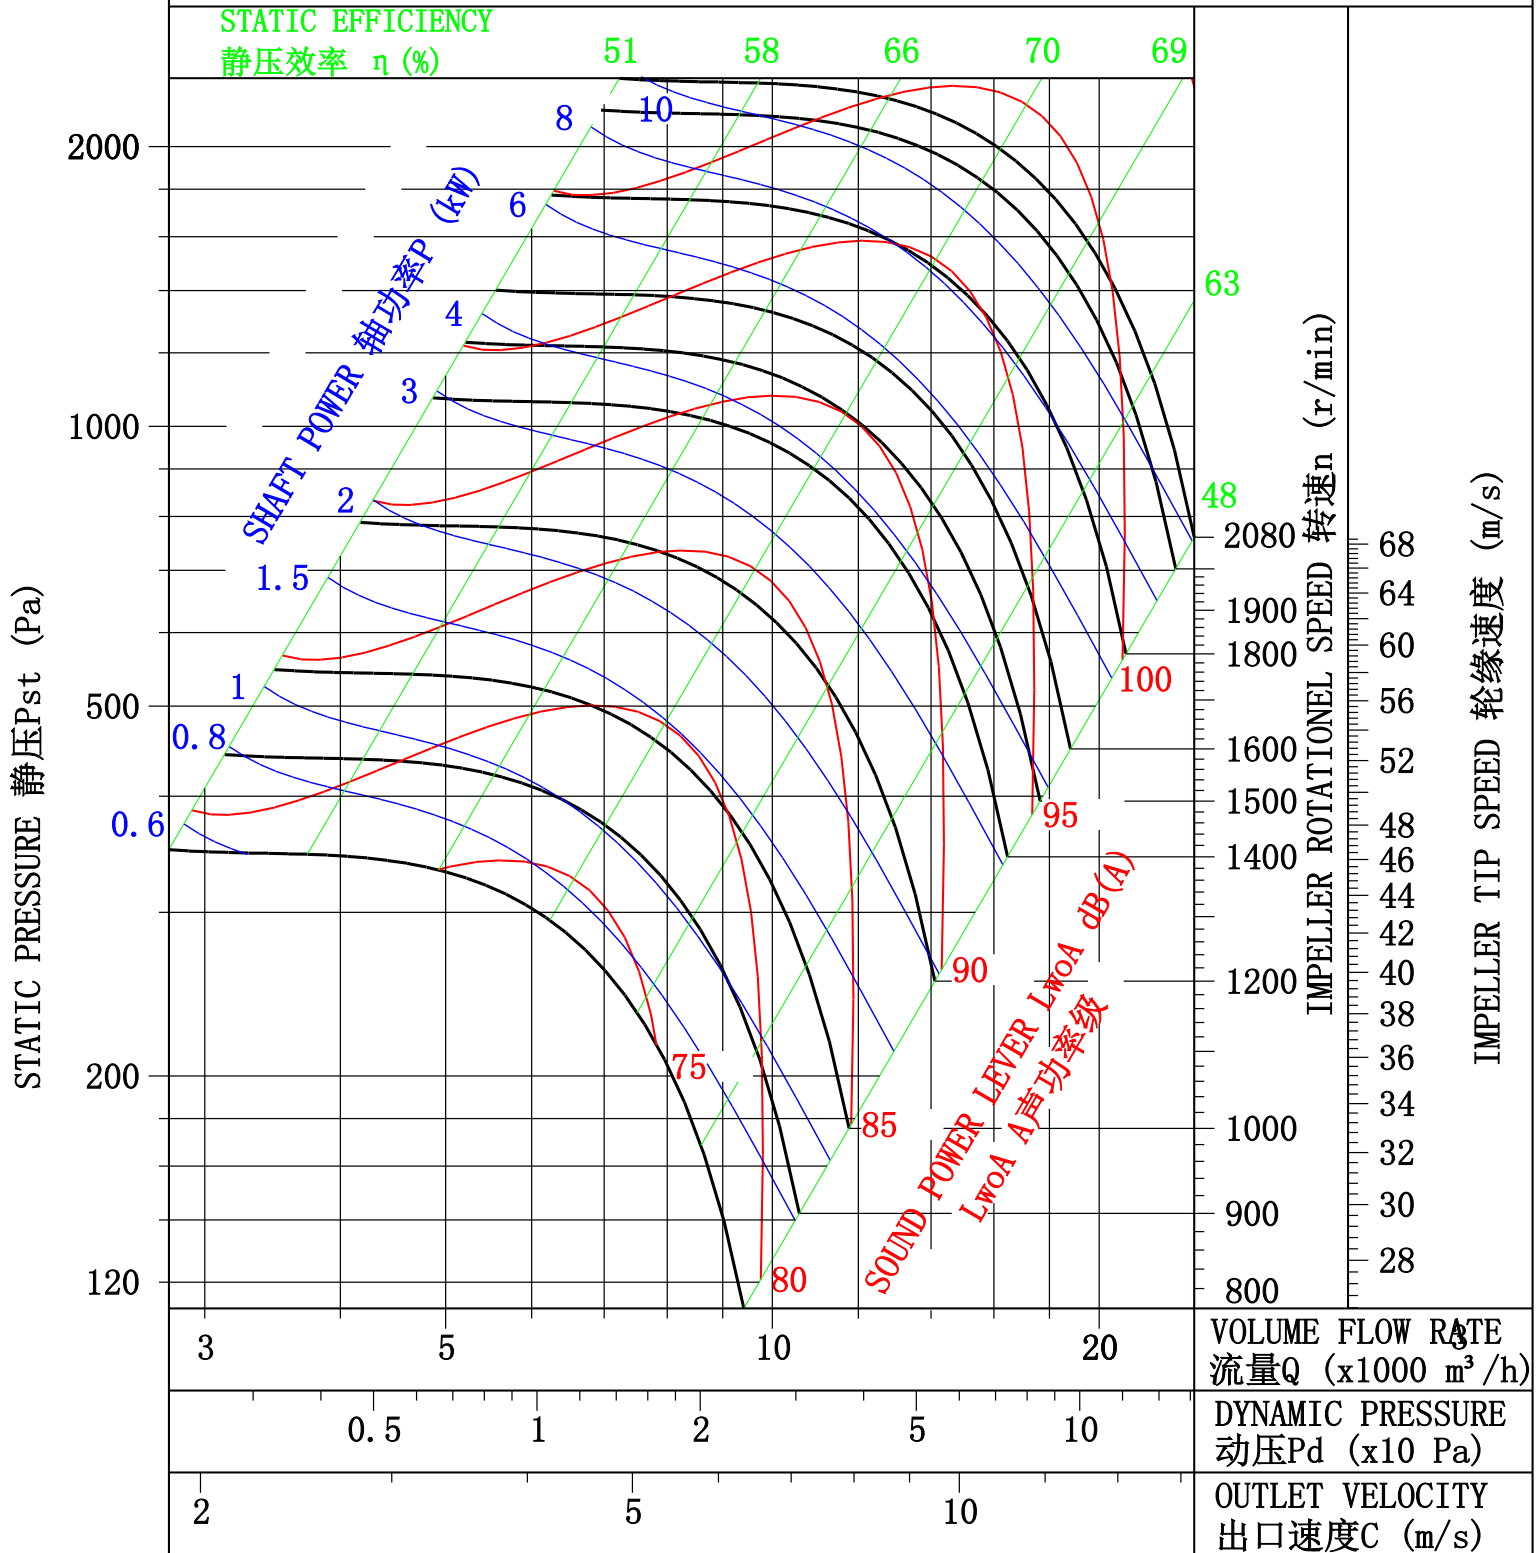


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX710

叶轮外径: 710mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

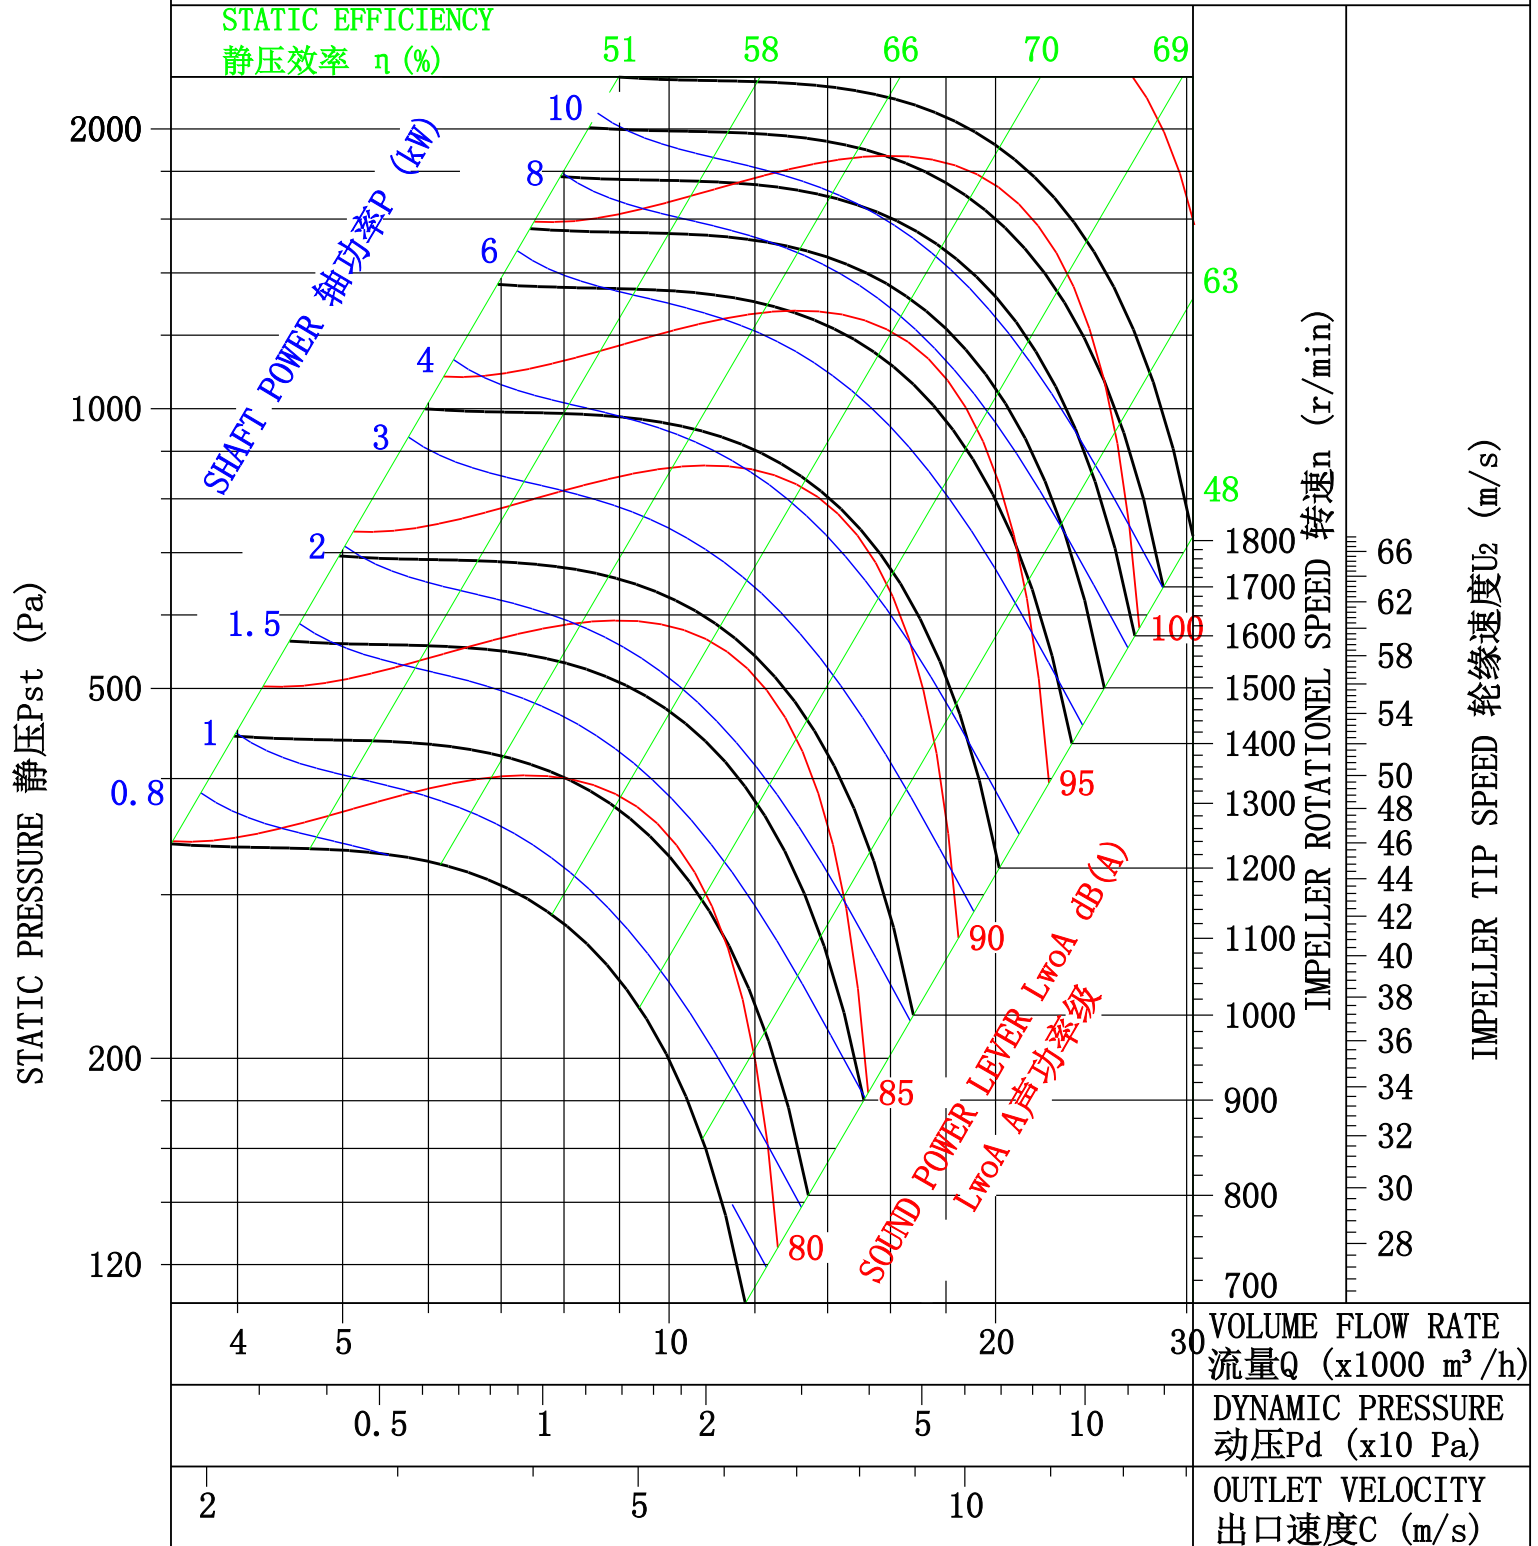


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX800

叶轮外径: 800mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

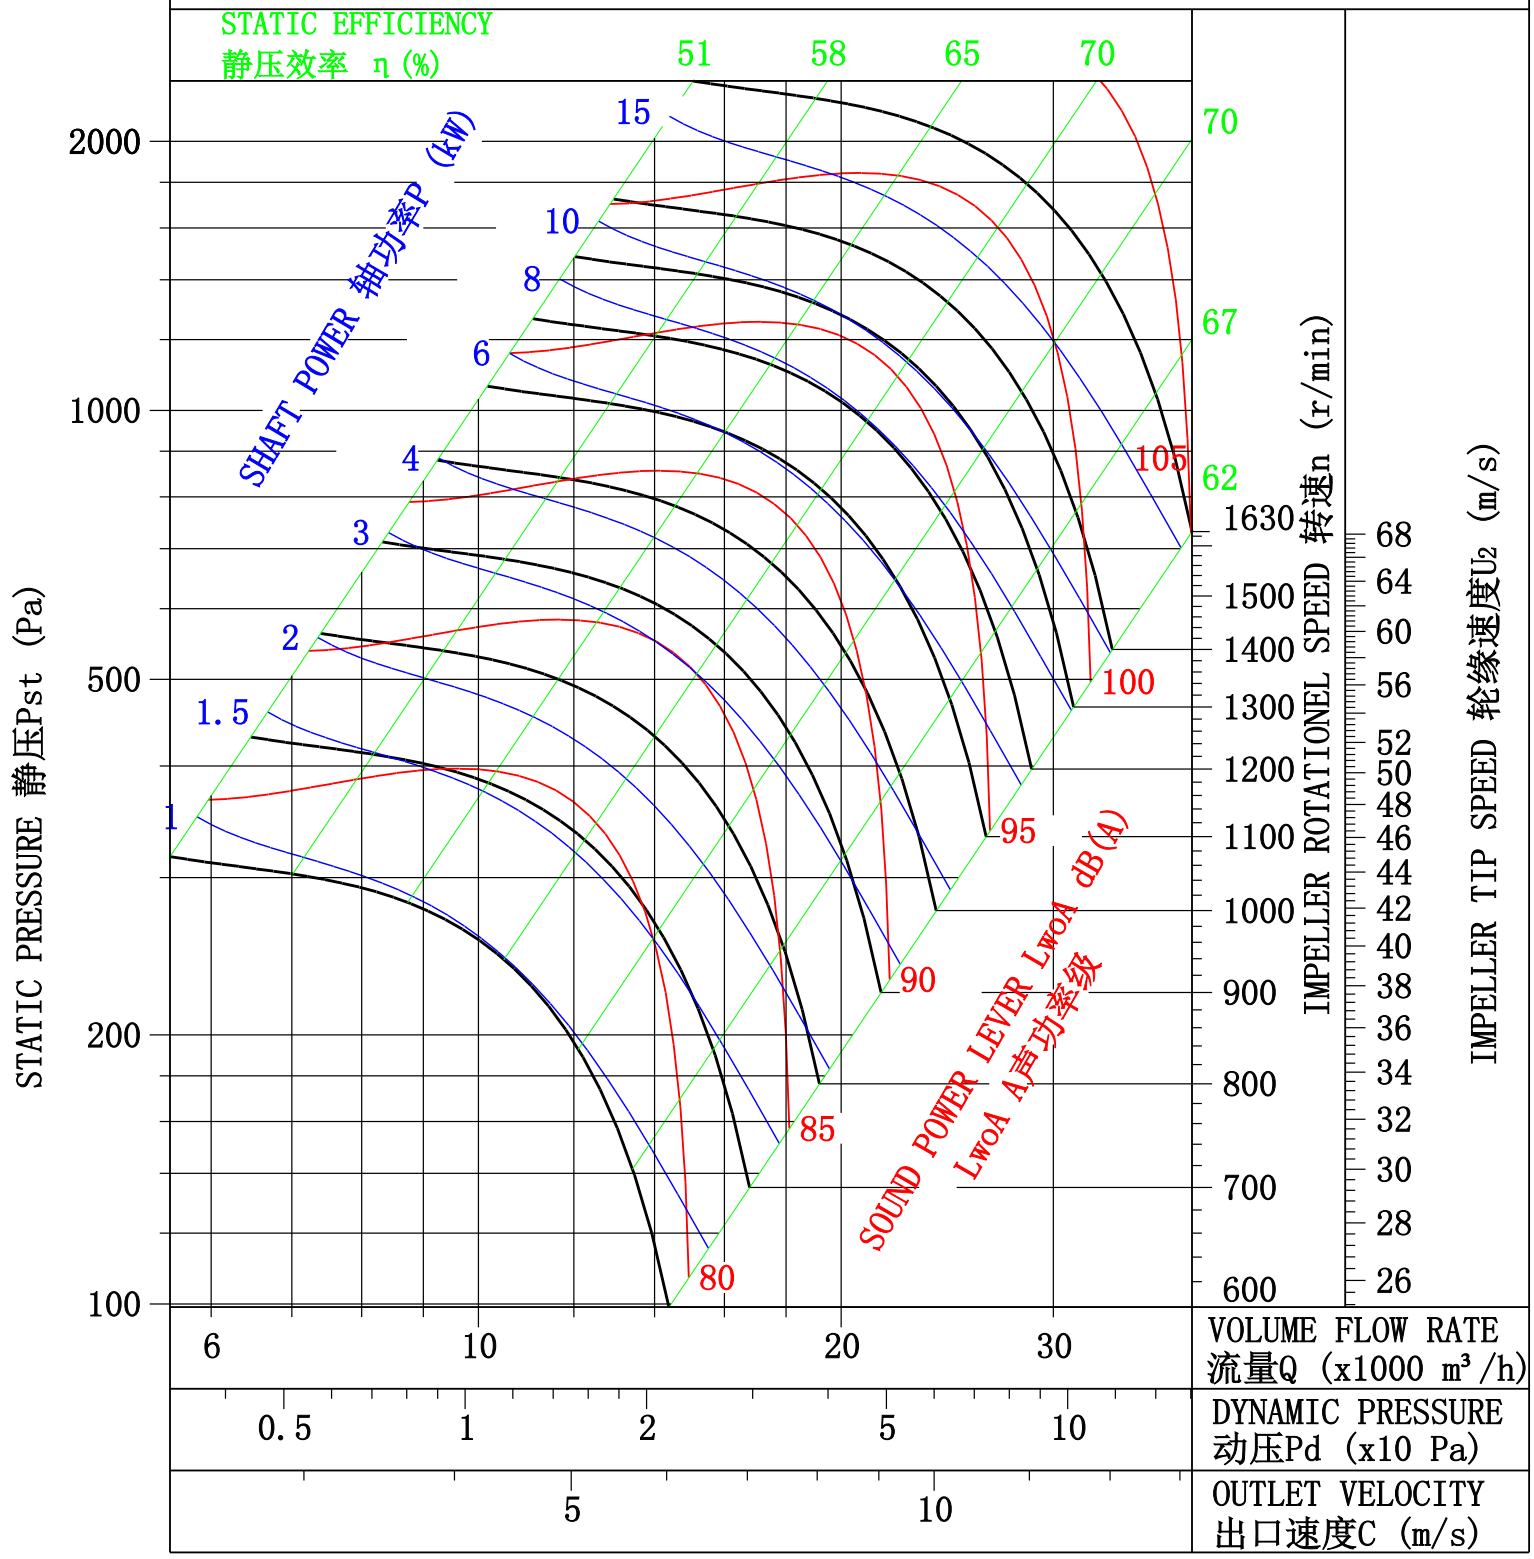


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX900

叶轮外径: 900mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

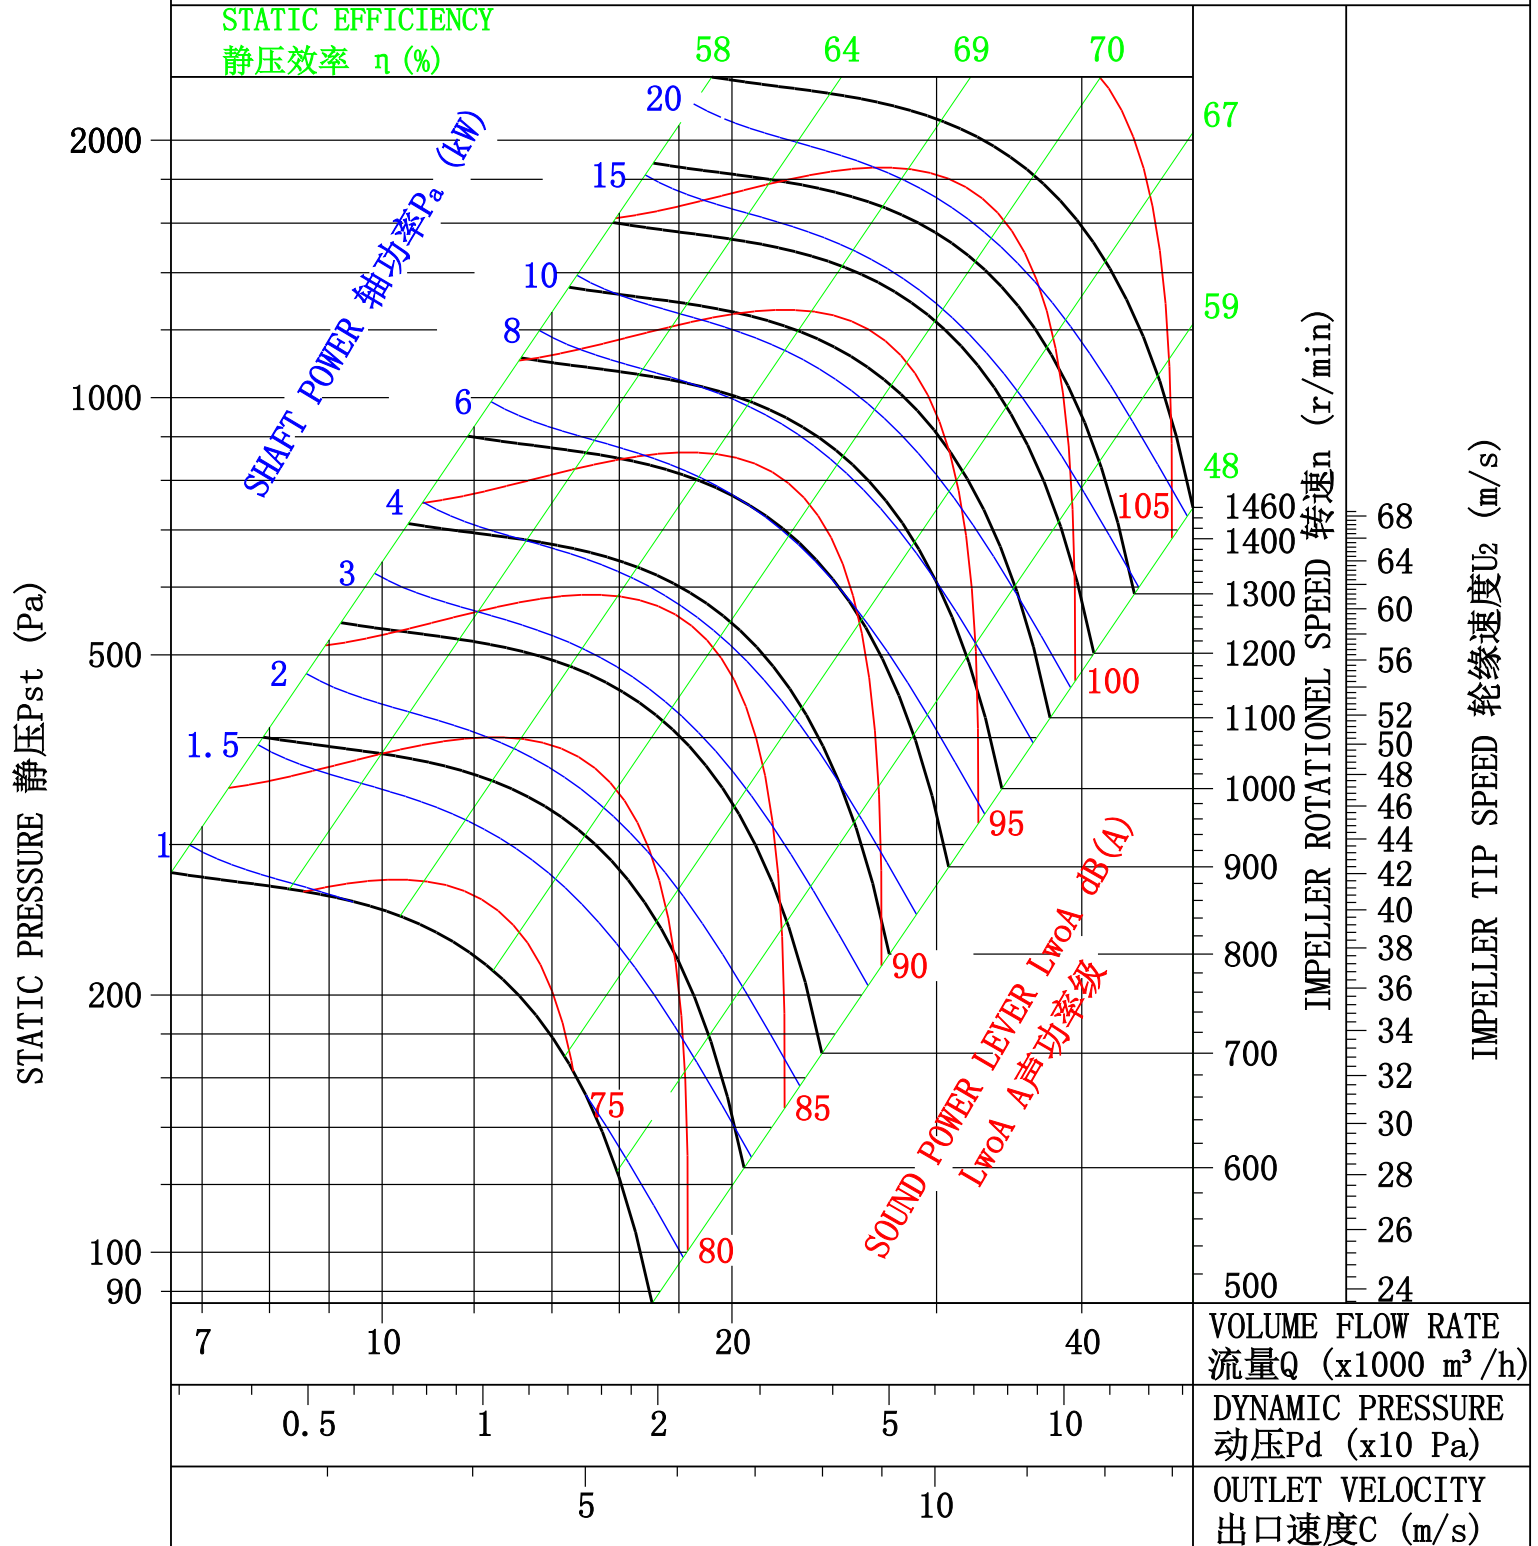


Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。

LDX1000

叶轮外径: 1000mm
Impeller diameter
气体密度: 1.2 kg/m³
Gas density

大气压: 101.32 kPa
Atmospheric pressure
气体温度: 20 °C
Gas temperature

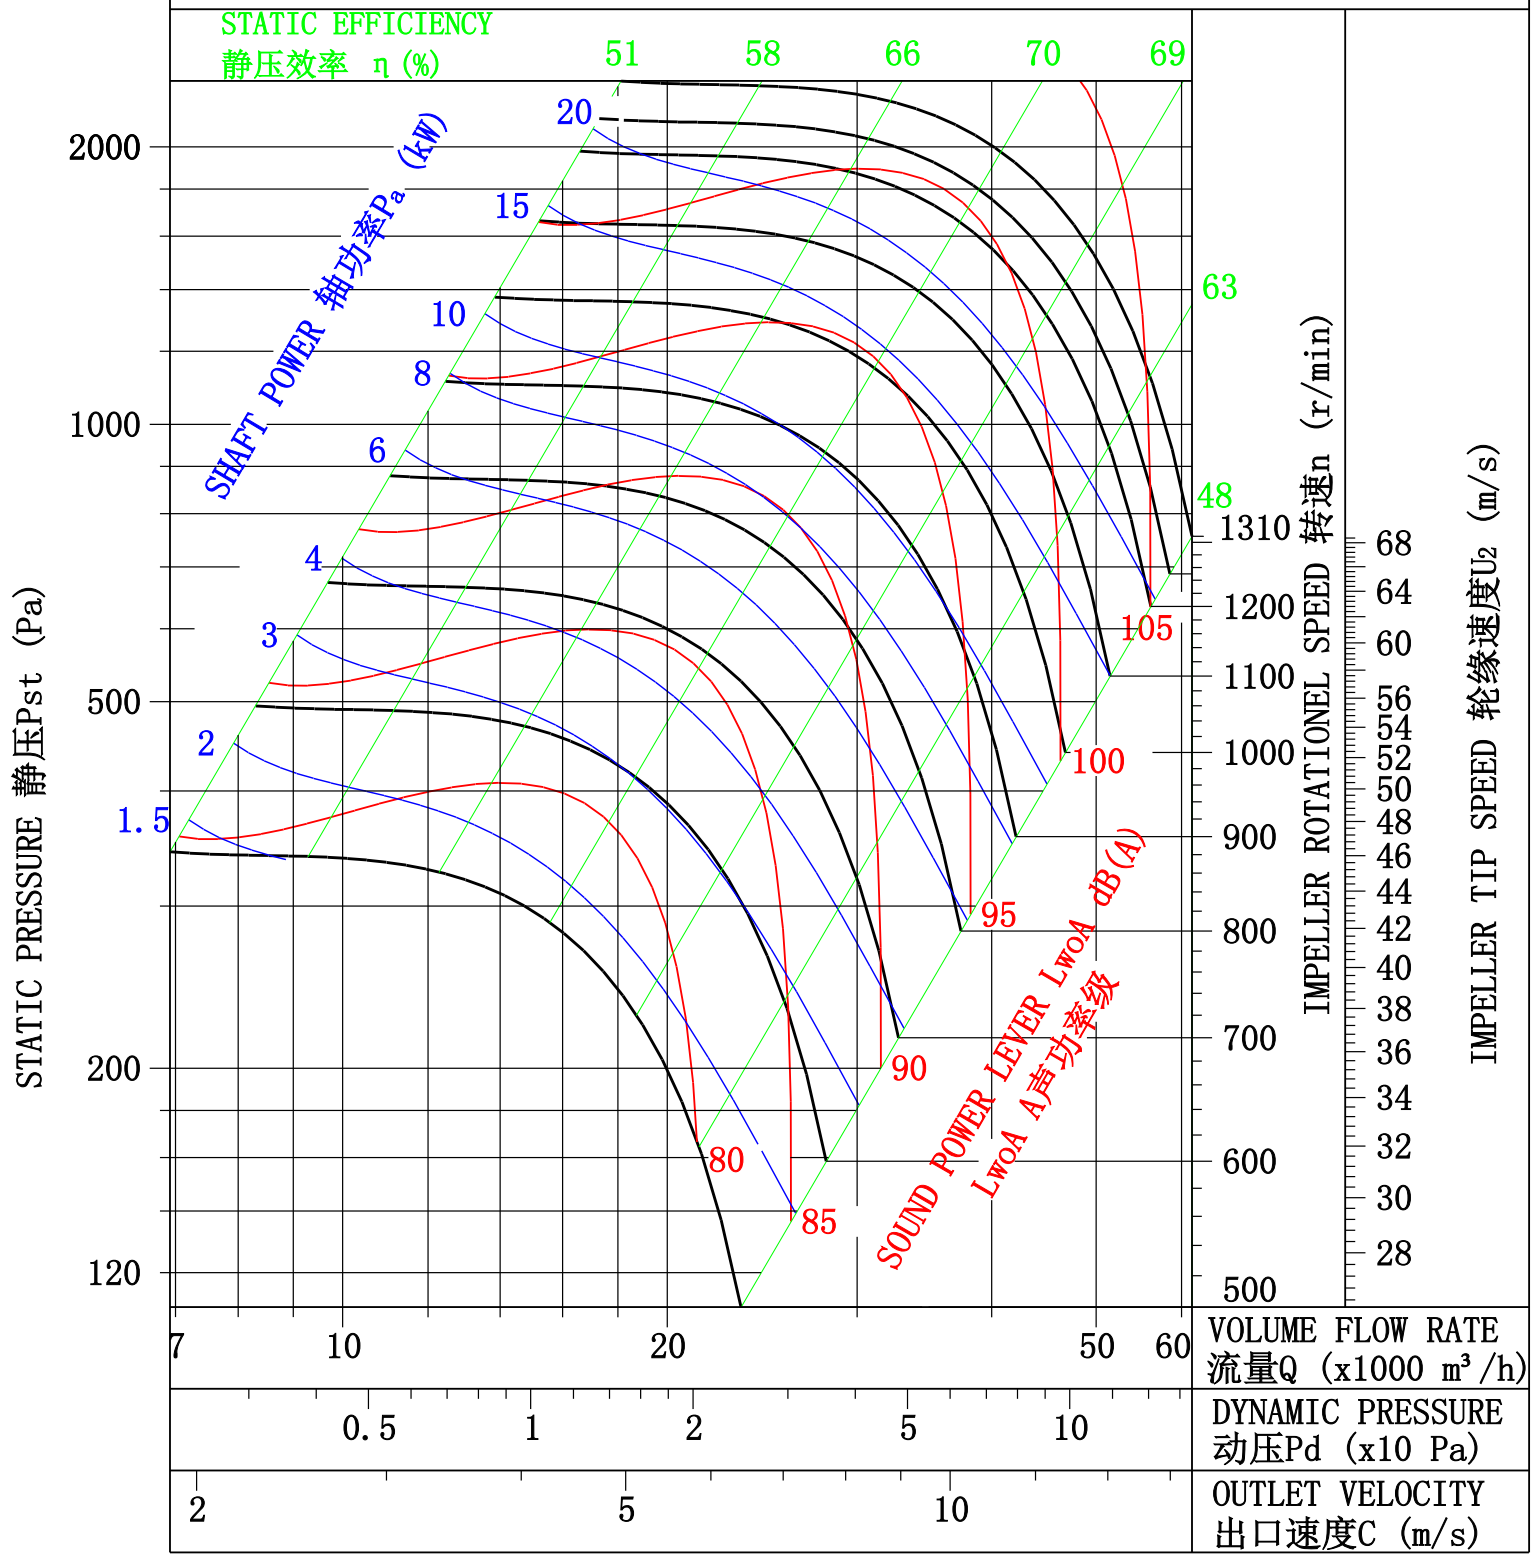

Performance shown is for installation type A, free inlet, free outlet, does not include the effects of appurtenances in the airstream. Power rating(kW) does not include drive losses

以上性能曲线是按方式A测试所得，即自由进气，自由出气，所测数据不包括气体流道上附件产生的影响。功率不包括驱动损失。